




REV.	REVISION	DATE

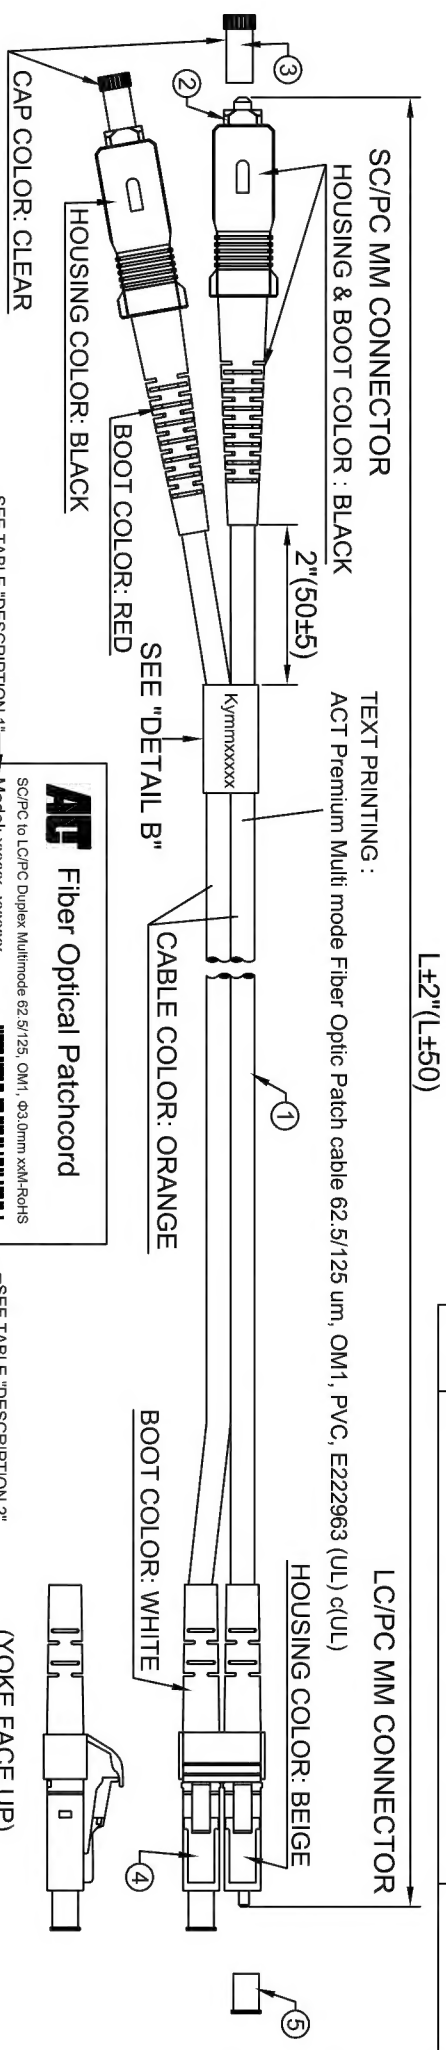

- NOTE:**
1. INSERTION LOSS: < 0.3dB.
 2. OPERATION TEMP: -25°C TO +80°C, 5 CYCLES.
 3. DURABILITY: 500 CYCLES.
 4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE
 5. TENSILE STRENGTH: 10kg.
 6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"		
BAG TYPE	QTY	LABEL
SMALL POLYBAG	1 CABLE WITH TESC CARD	SEE "DETAIL C"
MEDIUM POLYBAG	5 CABLES	NONE
LARGE POLYBAG	ALL	NONE

EACH LARGE POLYBAG IN AN OUTER CARTON

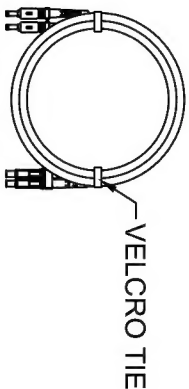

AF

Fiber Optical Patchcord

SC/APC to LC/APC Duplex Multimode 62.5/125, OM1, Ø3.0mm xxH-RxTx

Model: xxxxxx-xxxxxx

Lot number: _____


Performance (@23°C): A=850/1310,20m

Serial No	Insertion Loss ≤ 0.3dB	
	850nm	1310nm
A		
B		
C		
D		

Prepared By: _____ Date: _____

RL8020	20	20	65.6(20000)	942220-RL8020	8716065224436
RL8015	15	15	49.2(15000)	942215-RL8015	8716065224429
RL8010	10	10	32.8(10000)	942210-RL8010	8716065224412
RL8005	05	5	16.4(5000)	942205-RL8005	8716065171068
RL8003	03	3	9.84(3000)	942203-RL8003	8716065171051
RL8002	02	2	6.56(2000)	942202-RL8002	8716065171044
RL8051	51	1.5	4.92(1500)	9422015-RL8051	8716065224405
RL8001	01	1	3.28(1000)	942201-RL8001	8716065171037
PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2



				UNIT:	TITLE:	
				Inches[mm]	PATCHCORD SC-LC MULTIMODE	
5	2PCS	LC DUST COVER, WHITE.			DUPLICATE 62.5/125, OM1, 3.0mm, ORANGE.	
4	2SETS	CONNECTOR: LC/PC MM BEIGE HOUSING WITH WHITE BOOT.		DRAWN BY		
3	2PCS	SC DUST COVER, CLEAR.		Catherine	DATE	
2	2SETS	CONNECTOR: SC/PC MM, BLACK HOUSING WITH BLACK & RED BOOT.		CHECKED BY	2007/10/4	CUSTOMER
1	1PC	CABLE: MULTIMODE, 62.5/125um, 3.0mm ZIPCORD, OFNR, ORANGE JACKET.		APPROVED BY	DATE	CUSTOMER PART NO.
ITEM	Q'TY	PART NO.	DESCRIPTION		DRAWING NO.	Ref. NO.
			PART LISC		PK709020	REV.
					TRENDX PART NO.	A